
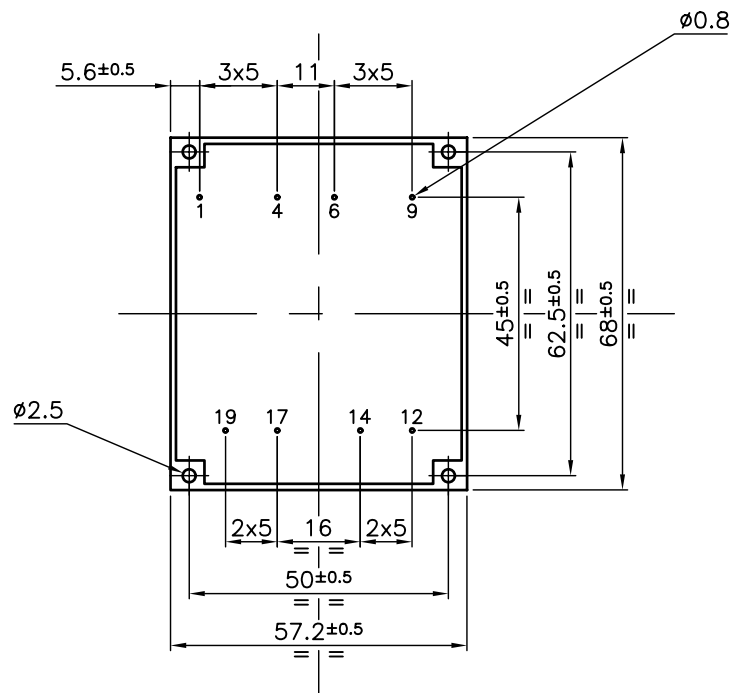
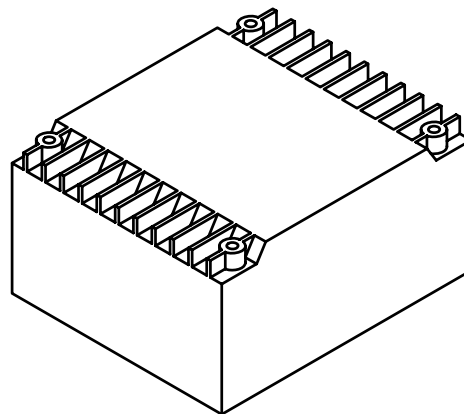

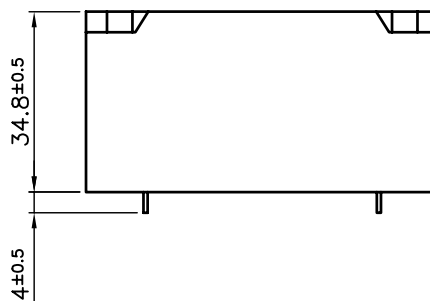


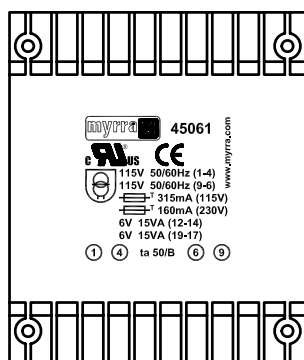

SAFETY ISOLATING TRANSFORMER


POWER : 30VA
INPUT VOLTAGE : 2x115V
FREQUENCY : 50/60Hz
NOMINAL OUTPUT VOLTAGE : 2x6V

NON SHORT CIRCUIT PROOF TRANSFORMER
IP00
UL94HB
OPERATING TEMPERATURE : -25°C to 50°C
STORAGE TEMPERATURE : -25°C to 85°C
INSULATION CLASS (IEC85) : B

REQUIRED PROTECTION : ON PRIMARY 315mA (115V)
160mA (230V)

STANDARDS :
UL506 (File E111078)
CSA 22-2 (File E111078)
CE

CONFORM TO :
EN61558-1
EN61558-2-6

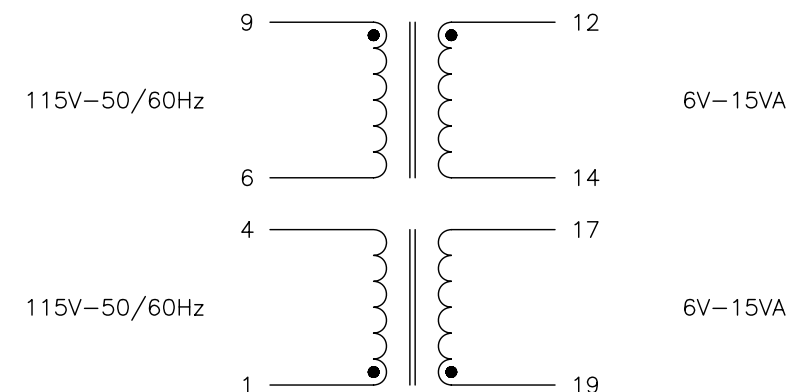

Finition:		Tolérance générale:	
Finition:		General tolerance:	
Ech: 1:1	Matière:		
	Material:		
Dessiné par:	ROUSSEL.Ch	Date:	20/09/2005
		Visa:	J.P.M.
DATA SHEET 45061			
UI 39x21			
		22 Allée du Clos des Charmes Z.A. Les Portes de la Forêt 77090 COLLEGIEN Tel : 01-60-37-55-55 Fax : 01-60-17-12-00	
		DS45061	

Rev	Date	Modification	Dessiné	Visa
D				
C				
B				
A				